


Dust Filter Cartridges

Easy Fit Ø 150 mm



FILTER

Applications


- Processing of mineral powders
- Foundries
- Pneumatic conveying
- Production of animal food
- Processing of cement

Advantages

- Installation without tools by snap lock
- from the clean side
- For all puposes in dust filtration
- Suitable for high dust loads

Features

The maximum operating temperature is 60 °C.
Filter cartridges for up to 110 °C, with metal parts of stainless steel, materials which are suitable for food or other individual types are available on request.

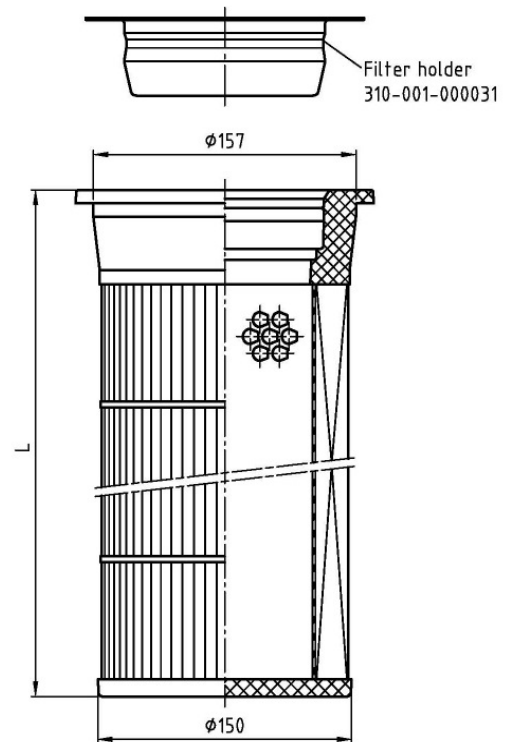

Filter Media

The filter media consist of polyester non wovens, polypropylene non wovens or needle felts. They can be equipped antistatic, oil and water repellent or with various finishes on the filter side. They are tested in accordance with DIN EN 60335-2-69. The filter media are suitable for the filtration of health-hazardous dusts. According to the application the best possible filter medium for the respective case is selected.

Accessories

Filter holder part no. 310-001-000031, solenoid valves, electronic valve controllers

Cleaning

Easy Fit filter cartridges are cleaned by pulses of compressed air.

Service

We advise you on the selection of the filter media.

For clean side installation		
Filter holder 310-001-000031		
Ø	Length L	Filter area
[mm]	[mm]	[m ²]
150	660	1,1
150	1040	1,9
150	1260	2,4
150	1460	2,7
150	1560	2,9
150	2060	3,9

Technical changes reserved.